


HOOT H-750/900 Gravity Series Wastewater Treatment System

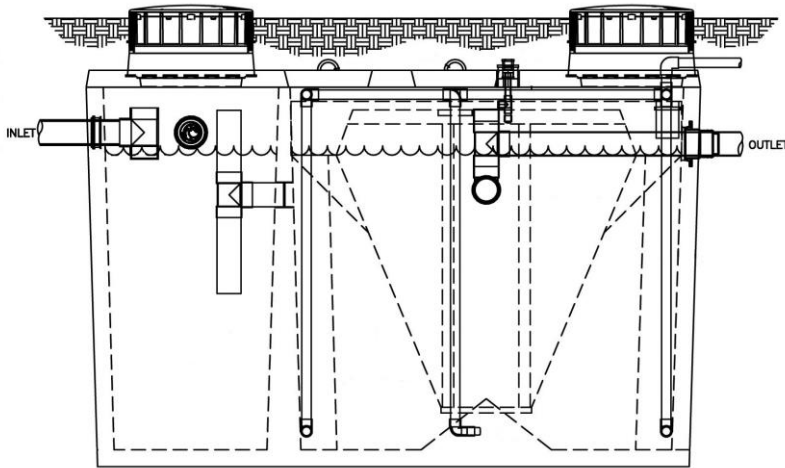

HOOT SYSTEM	Gallons (Capacities)		Weights (+/-) Pounds (lbs)	Bottom to Inlet	Bottom to Outlet	Tank Length	Tank Width	Tank Height
	Trash	Treatment						
H750/900	780	1373	17,000	64"	62"	121"	84.5"	72"

PRODUCT HIGHLIGHTS

- ❖ NSF – ANSI/NSF Standard 40
- ❖ Treats up to 900 gallons a day
- ❖ One tank design
- ❖ Easy Installation
- ❖ Onsite Monitoring Available
- ❖ Exceeds California's wastewater/septic requirements.

SUGGESTED COVERAGE DESIGN LIMITS

- ❖ Standard Tank Coverage Design Limits: 1'-0" to 2'-6"
- ❖ H-20 Tank Coverage Design Limits: 1'-0" to 3'-6"
- ❖ H-20 (non-traffic) Tank Coverage Limits: 1'-0" to 4'-0"

- ❖ Two years of service and maintenance included
- ❖ All H-Series Hoot systems come with a two-year manufacturer's product warranty
- ❖ Remote monitoring available. Alerts the Qualified Service Provider in the event of a system alarm
- ❖ Hoot systems are municipal wastewater treatment plants sized for residential use
- ❖ H-Series uses an advance, five stage, biological eco-system to treat waste stream
- ❖ 98% of the treatment happens inside the H-Series tank prior to dispersal
- ❖ Treated effluent meets NSF/ANSI Standard 40 "Class 1 Treatment" standards
- ❖ 98% Reduction CBOD5, 99% Reduction TSS, 99% Conversion of Ammonia (NH3)
- ❖ H-Series features an energy efficient linear compressor (Blower)
- ❖ Hoot tanks are precast using Barchip structural fiber for additional reinforcement
- ❖ Manufactured locally and assembled using recycled materials (milk jugs)
- ❖ System components are assembled at controlled manufacturing facility
- ❖ Polylok water tight risers and lids secured with stainless steel safety screws

Superior On-Site Solutions

3609 Bradshaw Road #311
 Sacramento CA 95827
 877-669-HOOT (4668)