


PRODUCT HIGHLIGHTS

- ❖ NSF – ANSI/NSF Standard 40
- ❖ Two- tank design
- ❖ Easy Installation
- ❖ Onsite Monitoring Available
- ❖ Exceeds California's wastewater/septic requirements.

HOOT H-600 (2-Piece) Series Wastewater Treatment System

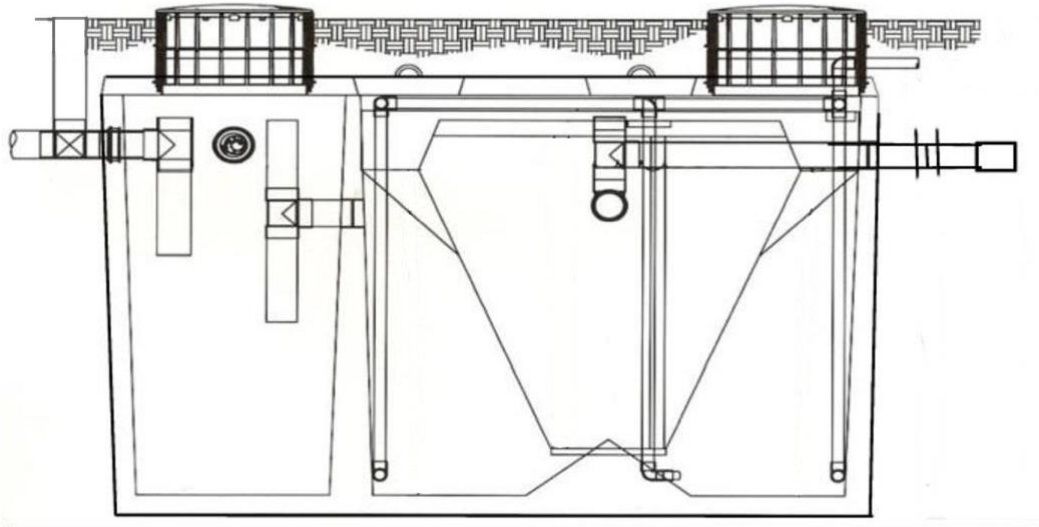

Hoot System	Gallons (Capacities)		Weights (+/-) Pounds (LBs)	Bottom to Inlet	Bottom to Outlet	Tank Lentgh	Tank Width	Tank Height
	Trash	Treatment						
H600AND	775	1240	12,000	59.25"	57"	114.5"	76"	68.5"

SUGGESTED COVERAGE DESIGN LIMITS

- ❖ Standard Tank Coverage Design Limits: 1'-0" to 2'-6"
- ❖ H-20 Tank Coverage Design Limits: 1'-0" to 3'-6"
- ❖ H-20 (non-traffic) Tank Coverage Limits: 1'-0" to 5'-0"

- ❖ Two years of service and maintenance included
- ❖ All H-Series Hoot systems come with a two-year manufacturer's product warranty
- ❖ Remote monitoring available. Alerts the Qualified Service Provider in the event of a system alarm
- ❖ Hoot systems are municipal wastewater treatment plants sized for residential use
- ❖ H-Series uses an advance, five stage, biological eco-system to treat waste stream
- ❖ 98% of the treatment happens inside the H-Series tank prior to dispersal
- ❖ Treated effluent meets NSF/ANSI Standard 40 "Class 1 Treatment" standards
- ❖ 98% Reduction CBOD5, 99% Reduction TSS, 99% Conversion of Ammonia (NH3)
- ❖ H-Series features an energy efficient linear compressor (Blower)
- ❖ Hoot tanks are precast using Barchip structural fiber for additional reinforcement
- ❖ Manufactured locally and assembled using recycled materials (milk jugs)
- ❖ System components are assembled at controlled manufacturing facility
- ❖ Polylok water tight risers and lids secured with stainless steel safety screws

PROMOTING ADVANCED WASTEWATER TECHNOLOGY

Superior On-Site Solutions

3609 Bradshaw Road #311
Sacramento CA 95827
877-669-HOOT (4668)