




Superior On-Site Solutions

WWW.SOSONSITECA.COM

HOOT H-600 (2-Tank) Wastewater Treatment System

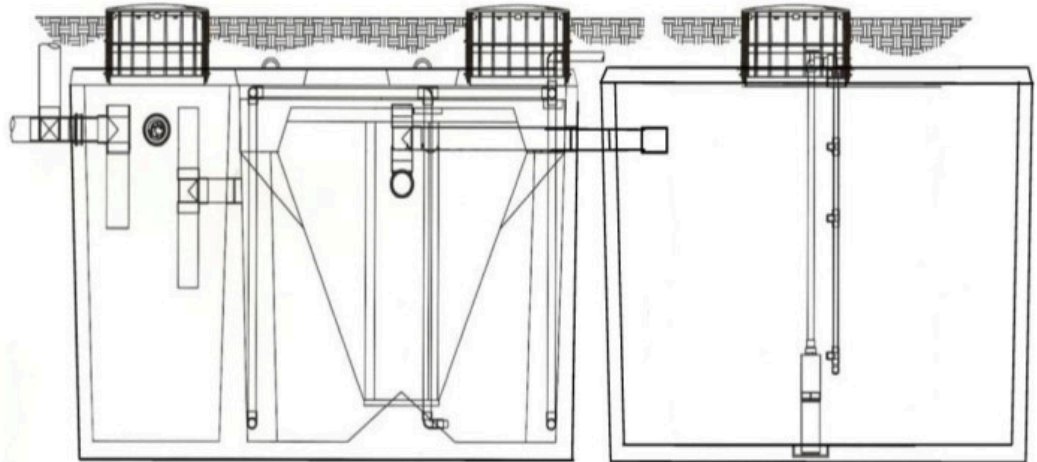

Hoot System	Gallons (Capacities)		Weights (+/-) Pounds (LBs)	Bottom to Inlet	Bottom to Outlet	Tank Lentgh	Tank Width	Tank Height
	Trash	Treatment						
H600AND	775	1240	12,000	57"	54.75"	115"	76"	68.5"
Pump	1000		8,000	54"		96"	60"	67"

PRODUCT HIGHLIGHTS

- NSF - ASNI/NSF Standard 40
- Treats up to 600 gallons a day
- Easy Installation
- Onsite Monitoring Available
- Exceeds California's wastewater/septic requirements.

SUGGESTED COVERAGE DESIGN LIMITS

- Standard Tank Coverage Design Limits: 1'-0" to 2'-6"
- H - 20 Tank Coverage Design Limits: 1'-0" to 3'-6"
- H - 20 (non-traffic) Tank Coverage Limits: 1'-0" to 5'-0"

- Two years of service and maintenance included
- All H-Series Hoot systems come with a two-year manufacturer's product warranty Remote monitoring available. Alerts the Qualified Service Provider in the event of a system alarm
- Hoot systems are municipal wastewater treatment plants sized for residential use H-Series uses an advance, five stage, biological eco-system to treat waste stream 98% of the treatment happens inside the H-Series tank prior to dispersal
- Treated effluent meets NSF/ANSI Standard 40 "Class 1 Treatment" standards
- 98% Reduction CBOD5, 99% Reduction TSS, 99% Conversion of Ammonia (NH3) H-Series features an energy efficient linear compressor (Blower)
- Hoot tanks are precast using Barchip structural fiber for additional reinforcement Manufactured and assembled using recycled materials (milk jugs)
- System components are assembled at controlled manufacturing facility
- Polylok water tight risers and lids secured with stainless steel safety screws

Promoting Advanced Wastewater Technology!

Superior On-Site Solutions

3645 Bradshaw Road #311 Sacramento, CA 95827

877-669-HOOT (4668)